



PN16 Cast Iron 'Y' Strainer

Features

- Flanged BS 4505 PN16
- Body Cast Iron
- Screen Stainless Steel AISI 304
- Drain Plug on Bonnet (15mm-40mm not available)
- Screen comes with reinforcing frame (15mm-40mm not available)

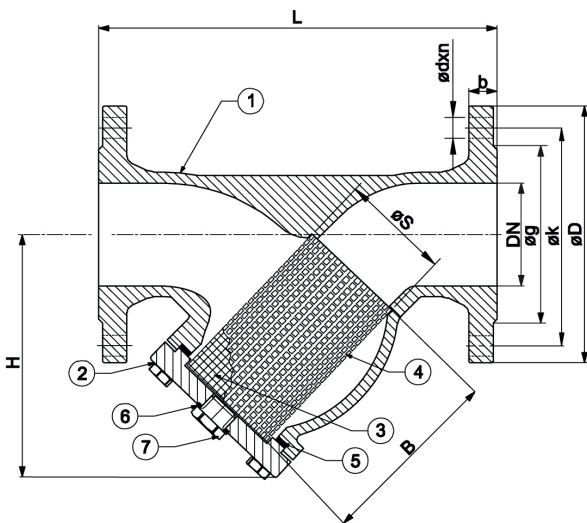

Pressure / Temperature

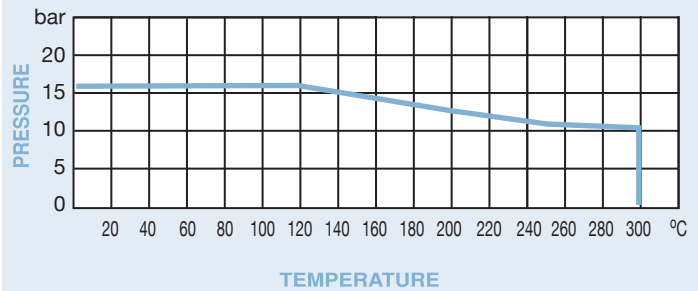

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
H	65	78	88	126	135	145	165	175	236	267	298	340	390	440	520	630
Hmax	117	140	160	203	232	260	333	363	454	510	579	657	875	960	1160	1329
B	47	61.5	69.5	82	96	100	132	149	192	227	244	313	395	425	640	699
S	25	32	38	47	46	55.5	78	89.5	109	135	160	210	258	308	365	410
D	95	105	115	140	150	165	185	200	220	250	285	340	405	460	520	580
k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525
g	46	56	65	76	84	99	118	132	156	184	211	266	319	370	429	480
b	14	16	16	18	18	20	20	22	24	26	26	30	32	32	36	38
dnx	14	14	14	19	19	19	19	19	19	19	23	23	28	28	28	31
n	4	4	4	4	4	4	4	8	8	8	8	12	12	12	16	16
mesh	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
Kgs	2	3	4	6	7.5	10.5	16	21.5	28.5	39	52.5	89.5	149	228	340	505

Technical Data

Max Pressure 16 Bar

Working Temperature -10°C to +300°C

N.	Part Name	Materials
1	Body	Cast Iron
2	Bonnet	Cast Iron
3	Filter	Stainless Steel 304
4	Reinforcing Frame	Stainless Steel 304
5	Gasket	Klingerit
6	Plug Gasket	Copper
7	Plug	Steel

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.