



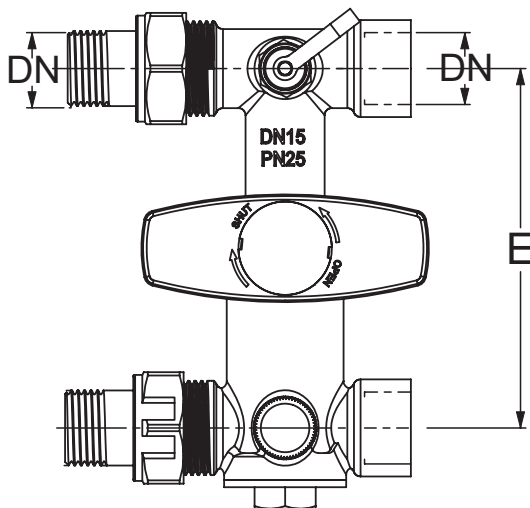

H Block Screwed

Features

- Screwed BSP F X Union Male
- Body Brass CW 602 N-M
- 5 year guarantee
- Tested to EN12266-1:2003
- Complete with test point & Air vent

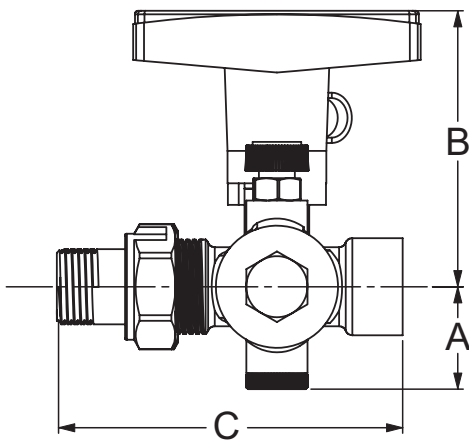


Technical Data

Max Pressure	25 Bar
Working Temperature	-10°C to +120°C


Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

Flow and Pressure Drop

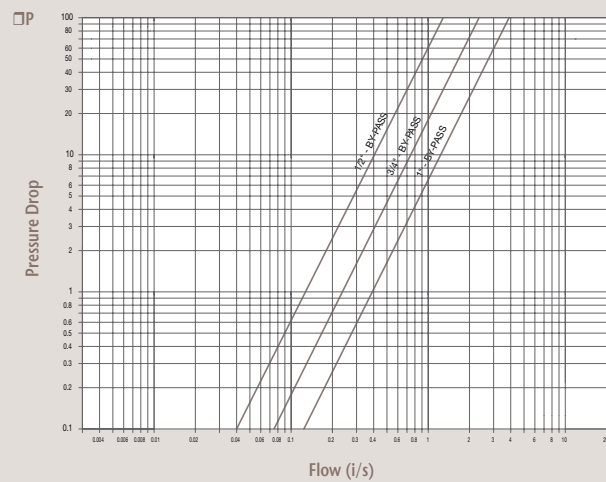

Pressure/Temperature

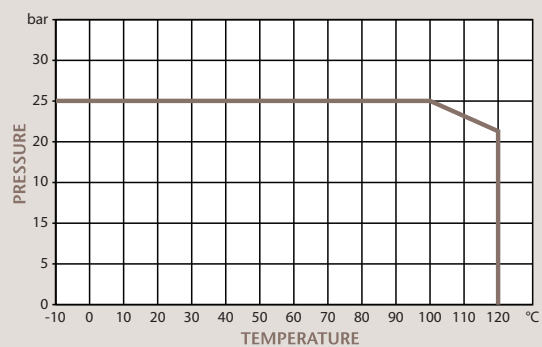


DN	1/2"	3/4"	1"	1 1/4"	1 1/2"
Ø	15	20	25	32	46
A	29	33	35	37.5	37.5
B	77	81	85	85	85
C	96	119	143	157	165
E	100	100	150	175	175
Kgs	0.79	1.17	1.58	2.86	3.50





'H' Block Complete with Art 25

Features

- Available in BSP & M Press
- Material Brass
- Tested in accordance with EN 12266-1:2003
- 5 year guarantee

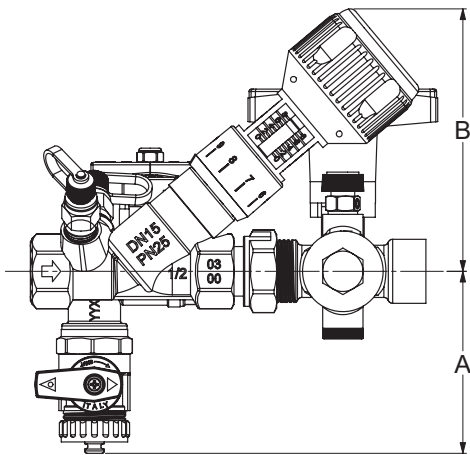

Pressure/Temperature

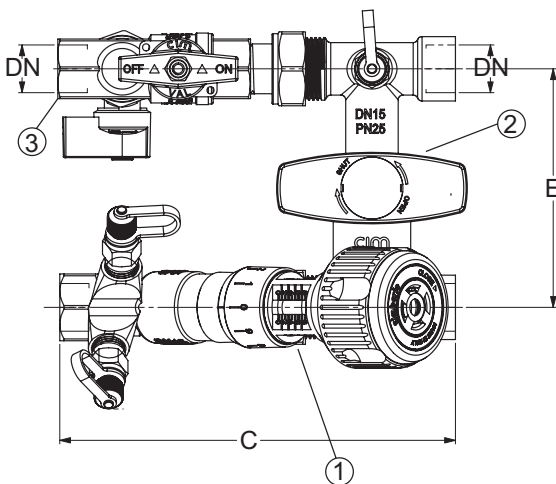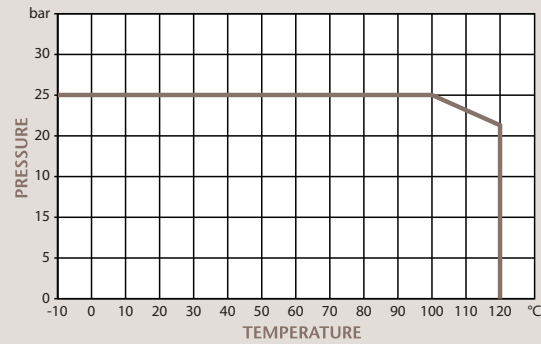

DN	1/2"	3/4"	1"
Ø	15	20	25
A	77	81	91
B	110	129	138
C	170	205	245
E	100	100	150
Kgs	2.06	2.82	4.19

Technical Data

Max Pressure	25 Bar
Working Temperature	-10°C to +120°C

N.	Part Name	Material
1	Art 25	FODRV
2	Art 731	'H' Block
3	Art 630	Ball Valve, Strainer & Drain Cock

Dimensions in mm



This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.




'H' Block complete with Art 29 Automatic flow Balancing Valve

Features

- Available in BSP & M Press
- Material Brass
- Tested in accordance with EN 12266-1:2003
- 5 year guarantee

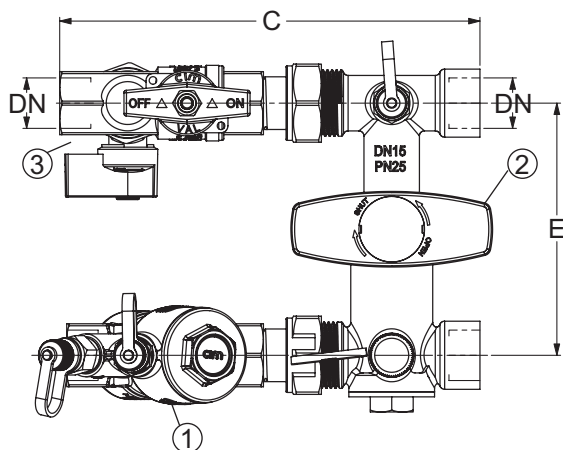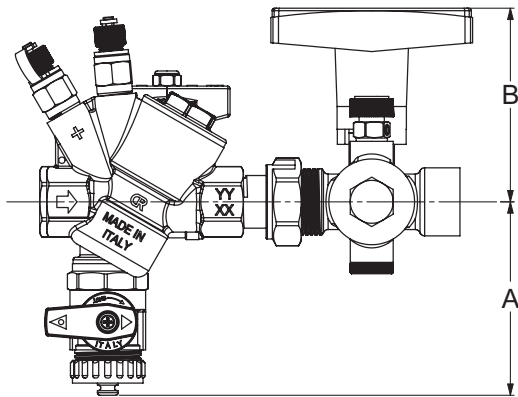

Pressure/Temperature

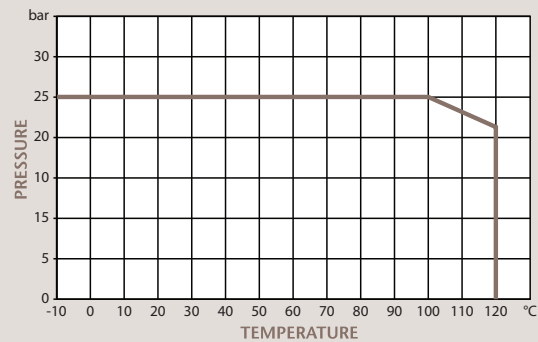

Technical Data

Max Pressure	25 Bar
Working Temperature	-10°C to +120°C

DN	1/2"	3/4"	1"
Ø	15	20	25
A	77	81	91
B	77	82	86
C	165	200	245
E	100	100	150
Kgs	1.87	2.37	3.67

N.	Part Name	Material
1	Art 29	Automatic flow balancing valve
2	Art 731	'H' Block
3	Art 630	Ball Valve, Strainer & Drain Cock

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.






'H' Block complete with Art 20 or Art 20C Pressure Independent Control Valve (PICV)

Features

- Available in BSP & M Press
- Material Brass
- Tested in accordance with EN 12266-1:2003
- 5 year guarantee
- Available in sizes 1/2", 3/4", 1", 1 1/4" & 1 1/2"

Pressure/Temperature

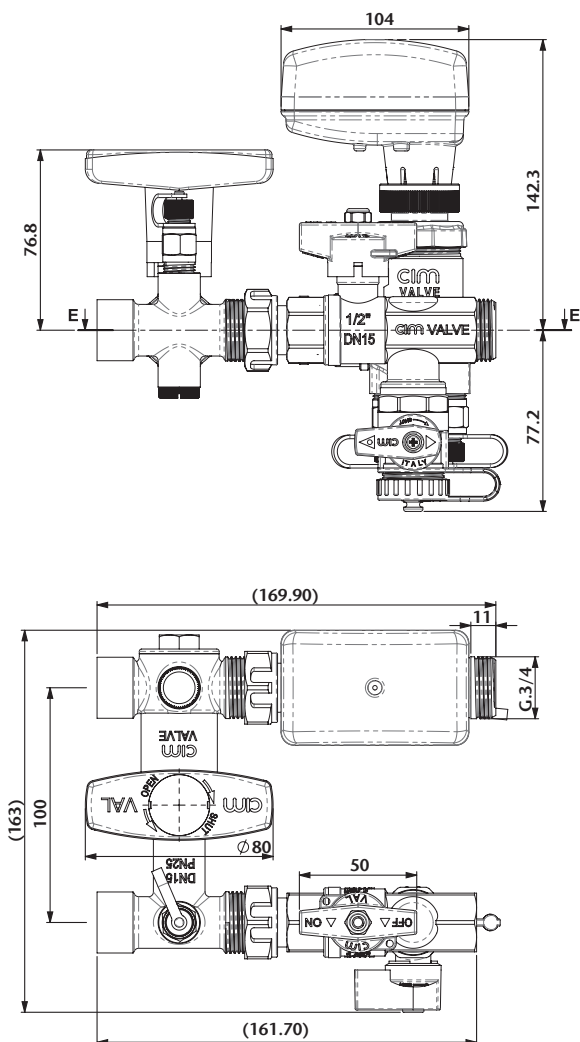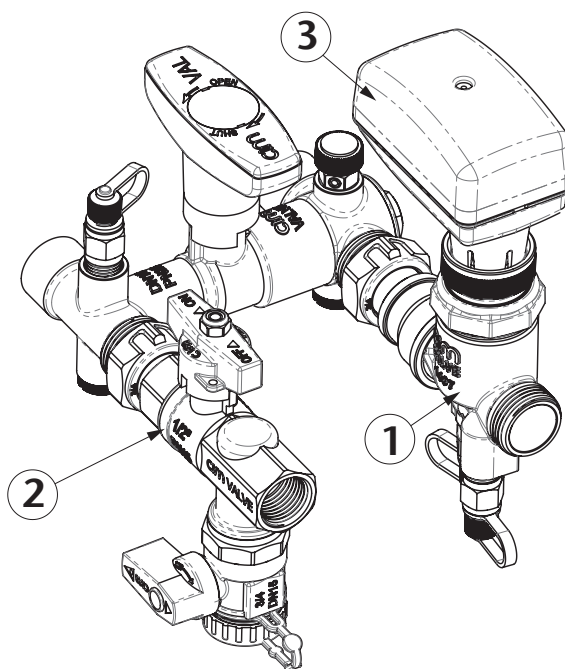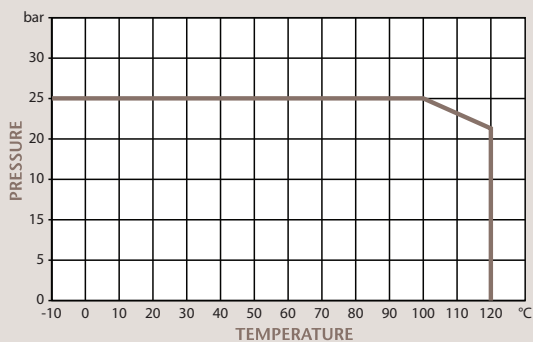

Technical Data

Max Pressure	25 Bar
Working Temperature	-10°C to +120°C

N.	Part Name	Material
1	Art 20C/20	PICV
2	Art 731	'H' Block
3	Art C21V/C22V/C23E	Control Actuator

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.