




Diaphragm Valve Weir Type

Features

- Flange PN10/16 (520) or ASA150 (530)
- Cast Iron Body Unlined
- Non Rising Handwheel Bonnet

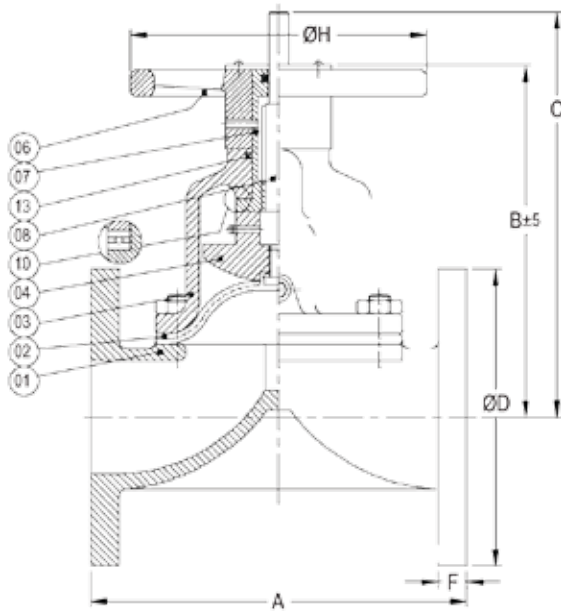

N.	Part Name	Materials
01	Body	Cast Iron
02	Diaphragm	As per list
03	Bonnet	Cast Iron
04	Compressor	Cast Iron
06	Handwheel	Delrin/PTFE
07	Stem Bushing	Cast Iron
08	Stem	Stainless Steel 410
10	Thrust Bearing	Cast Iron
15/16	Lubrication Fitting	Cast Iron

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

Diaphragm Available	Temperature Range
Grade A - Natural Rubber	-30°C to +80°C
Grade EP - EPDM	-30°C to +150°C
Grade R - Nitrile	-10°C to +90°C
Grade N - Neoprene	-25°C to +95°C
Grade B - Butyl	-25°C to +120°C
Grade H - Hypalon	-15°C to +100°C
Grade V - Viton	-5°C to +150°C
Grade T - PTFE/Neoprene	-30°C to +120°C

Technical Data
250mm to 350mm
5 bar

DN	250	300	350
A	635	749	749
B	545	649	795
C	689	815	1020
øD	406	483	533
øH	587	690	690
F	24.0	24.0	26.0
Kgs	240	418	480