


ART 1553



I Ω

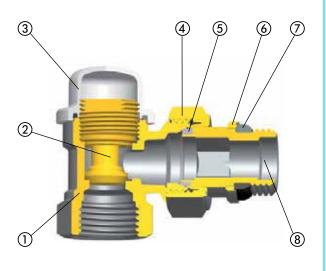

Technical Data

Max Working Temperature 100°C

Pressure 10 Bar


Radiator Valve

Features

- Screwed BSP Parallel M/F
- Auto Seal Tail Piece
- Suitable for use with all radiators

Angle Lockshield

BSP to Copper Adapter Available on Request

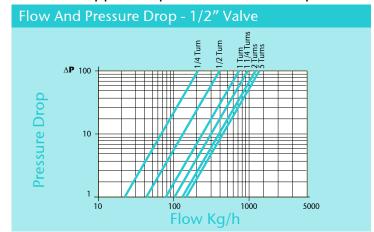

Flow An	d Pressur	e Drop - 3/4" Va		
ΔΓ	• 100 	1/4 Tum	1 Turn 1 1/4 Turns 2 Turns 5 Turns	_
Pressure Drop	10			
	1 10	100 Flow Kg/h	1000	5000

DN	3/8"	1/2"	3/4"
Α	47.0	52.0	59.0
В	20.0	23.0	26.0
C	29.0	29.0	29.0
F1	3/8"	1/2"	3/4"
F2	3/8"	1/2"	3/4"
Н	26.0	29.5	31.5

N.	Part Name	Materials
1	Body	Brass Nickel Plated
2	Bonnet	Brass
3	Cap	ABS
4	Nut	Brass Nickel Plated
5	Gasket	PTFE
6	Washer	Brass Nickel Plated
7	Gasket Rubber	EPDM
8	Tail Piece	Brass Nickel Plated