





PN20 DZR Double Regulating Valve

Features

- BSP parallel (ISO 7/1)
- Position indicator
- Double regulating valve
- Non rising stem
- EPDM disk seating gives tight shut off
- ½" available in Std. and Low flow versions
- Available with 'M' Press ends ART 26 PRS

Pressure/Temperature

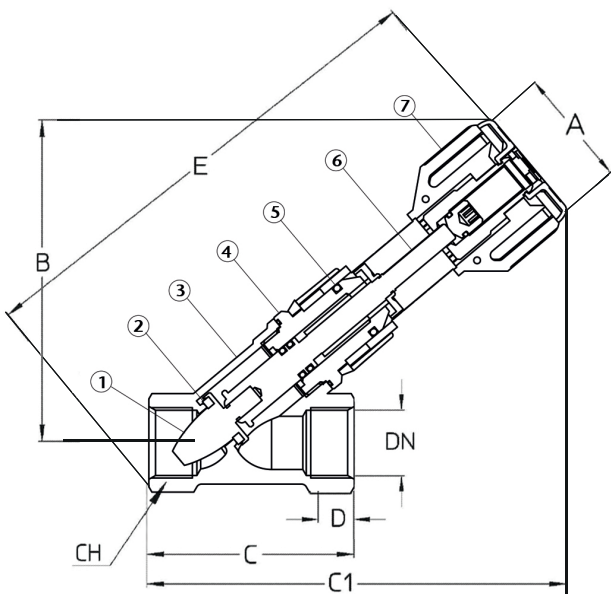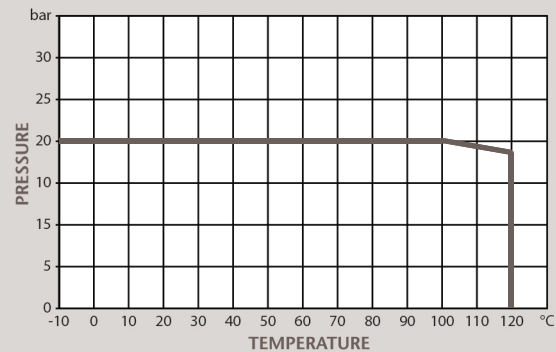

Technical Data

Max Pressure	20 Bar
Working Temperature	-10°C to +120°C

DN	½"	¾"	1"	1¼"	1½"	2"
A	51	51	51	51	57	57
B	104	121	133	141	181	190
C	68	77	91	108	116	143
C1	138	156.5	161	172	213	231.5
D	16.5	18	21	23	23	26
E	161	187	200	219	275	300
CH	28	33	40	51	56	71
Kgs	0.48	0.65	0.85	1.28	1.84	2.86

N.	Part Name	Materials
1	Cone	DZR Brass
2	Cone Seat	EPDM Rubber
3	Body	DZR Brass
4	Bonnet	DZR Brass
5	'O' Rings	Nitrile Rubber
6	Stem	DZR Brass
7	Handwheel	Nylon 6

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.