


Equal Percentage Control valve opening angle

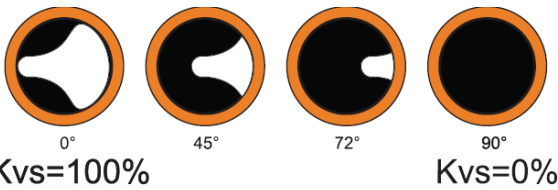


Technical Data	
Max Pressure PN Class	32 Bar
Working Temperature	2°C to +120°C
Max ΔP Valve	6 Bar

2 Port Brass Zone/Control Valve

Features

- BSP Parallel (ISO 7/1)
- Quick connection/release CLIP system utilised
- Zone and Isolation with ON-OFF (2 point control)
- WRAS approval DN15-32
- Optional Equal percentage control characteristic insert
- Anti-Legionella design ball
- Frost Proof ball and valve shape
- Raise/Lower (3 Point Control) or Modulating (0-10V) available

Pressure/Temperature

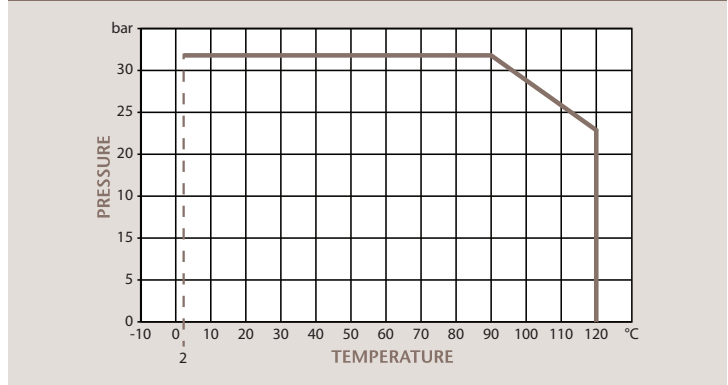

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ø	17	20	25	32	40	50
S	62	68	81	86	102	122
H	41	47	51	56	51	59
h	8	10	10	10	11	11
Connection	Clip	Clip	Clip	Clip	Iso	Iso
Kvs (m³/h)	20	45	60	100	170	265
Kg	0.23	0.35	0.54	0.70	1.08	1.70

N.	Part Name	Materials
1	Body	Brass CW617N
2	Body End	Brass CW617N
3	Seat	PTFE
4	O-Ring	EPDM
5	Ball	Brass
6	Washer	PTFE
7	Stem	Brass CW617N
8	O-Ring	EPDM
9	O-Ring	FPM
10	Washer	PTFE

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.