


Reducing Socket

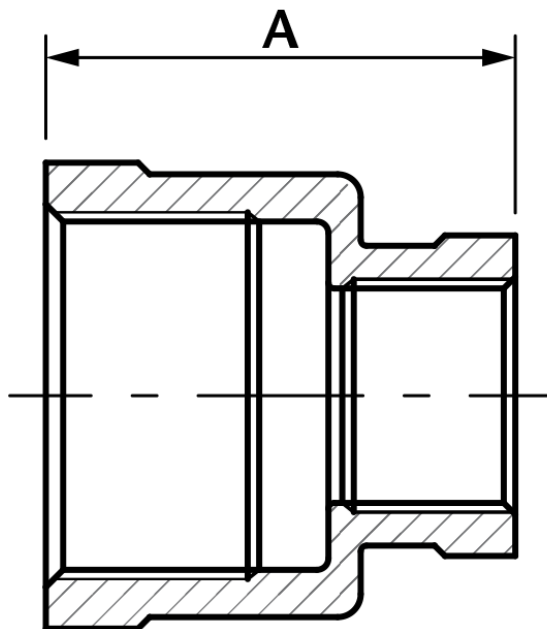

DN	A	Kgs
1/4" x 1/8"	26	0.029
3/8" x 1/4"	30	0.042
1/2" x 1/4"	34	0.055
1/2" x 3/8"	34	0.052
3/4" x 1/2"	37	0.085
1" x 1/2"	42	0.115
1" x 3/4"	42	0.136
1 1/4" x 1/2"	48	0.168
1 1/4" x 3/4"	48.5	0.175
1 1/4" x 1"	48.5	0.194
1 1/2" x 3/4"	52	0.221
1 1/2" x 1"	52	0.225
1 1/2" x 1 1/4"	52.5	0.245
2" x 1"	57	0.242
2" x 1 1/4"	58	0.363
2" x 1 1/2"	58	0.372
2 1/2" x 2"	65	0.567
3" x 2"	72.5	0.823
3" x 2 1/2"	72	0.822 NEW
4" x 2"	78.4	1.553
4" x 3"	94	1.460

- Made from CF8M (316) Stainless Steel material and conform to **ISO 4144** standard.
- Threads are to ISO 7-1 (DIN2999) BSPP Female, BSPT Male.
- Material certificates available on request.
- Pressure temperature ratings. See table below.

Temperature (°C)	Non-shock maximum working pressure (bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

NOTE 1 Pressure for intermediate temperatures may be determined by the interpolation method.

NOTE 2 Temperatures indicated are those of internal fluid.

NOTE 3 Piping loads, stresses and moments are not taken into account.

- Tested & inspected prior to despatch.
- 12 month warranty from date of installation.
- Manufactured in accordance with ISO9001:2008 quality system.