


Pressure Reducing Valve with gauge

Features

- Controls static and dynamic pressure
- Conforms to BS EN 1567
- Easy to service high temperature cartridge
- AISI 304 stainless steel cartridge filter
- Supplied with a pressure gauge
- WRAS Approved
- 1" to 2" BSP Taper Male Ends

Cavitation Chart

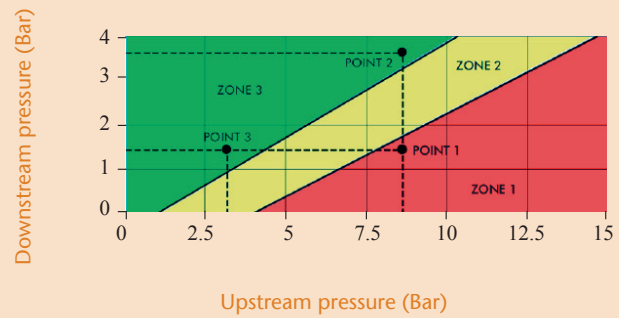

	1"	1 1/4"	1 1/2"	2"
A	199	217	236	269
B	134	138	144	146
C	24	30	37	47
D	61	61	61	61

NNo.	Part Name	Materials
1	Body	Cw602N
2	Cartridge	PA66 + 30% f.d.v.
3	Spring	EN 0270-3-1.431
4	Adjustable knob	PA66 + 30% f.d.v.
5	O-Ring	EPDM + Perox
6	Pressure gauge	
7	O-Ring	EPDM + Perox
8	Adaptor	CW617N
9	Gasket	EPDM + Perox
10	Male Union End	Cw617N
11	Nut	Cw602N

Technical Data

Max inlet pressure (static)	16 Bar
Adjustable pressure range	0.5 - 6 Bar
Min inlet pressure	0.5 Bar
Max inlet temperature	80°C
Factory set pressure	3 Bar

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.