



PN16 Stainless Steel Orifice Plate (OP)

Features

- Wafer pattern
- Fits between BS EN1092 flanges PN16
- Flow characteristic confirmed to BS 7350
- Fixed orifice with $\pm 5\%$ flow measurement accuracy
- Can be close coupled to a double regulating valve
- Supplied with 2 extensions and test points

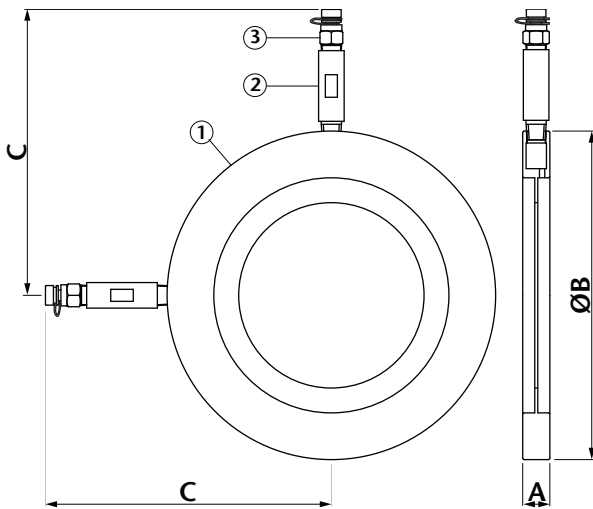

Pressure/Temperature

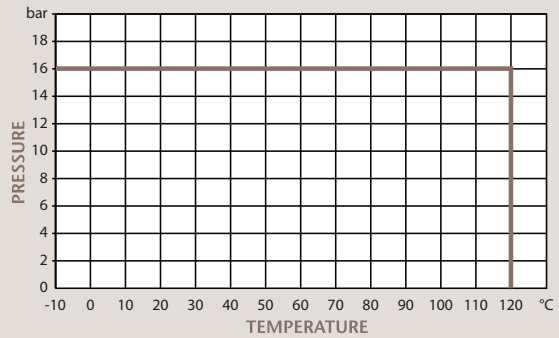

DN	50	65	80	100	125	150	200	250	300
A	20	20	20	20	20	20	20	20	20
B	108	127	144	164	194	220	275	330	385
C	136	145	153	164	178	192	219	248	274
Kgs	1.0	1.2	1.5	2.0	3.0	3.3	5.0	5.5	10.0

DN	350	400	450	500	600
A	20	20	30	30	30
B	445	495	555	617	734
C	304	329	359	390	449
Kgs	12.5	15.3	28.0	30.0	39.5

Technical Data

Max Pressure	16 Bar
Working Temperature	-10°C to +120°C

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

N.	Part Name	Materials
1	Body	304 Stainless Steel
2	Extension	304 Stainless Steel
3	Pressure Test Point	Brass