

## Technical Data


Max Pressure	20 Bar
Working Temperature	-10°C to +232°C

## PN20 Bronze 'Y' Type Strainer

### Features

- Available in Screwed BSP Taper (ISO 7/1) or NPT (ANSI B1.20.1)
- Bronze Body
- Screwed Cap
- PN20 Rated
- WRAS Approved

### PRESSURE / TEMPERATURE

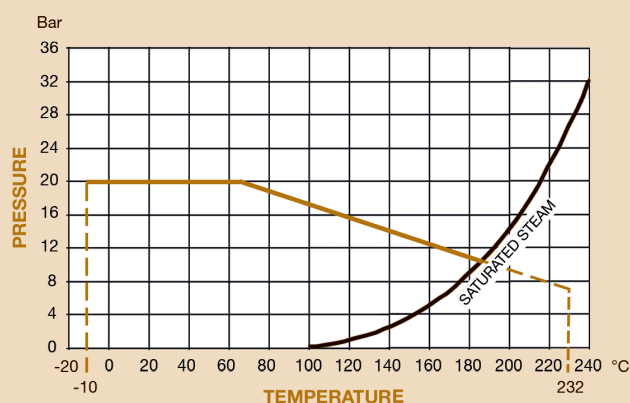

DN	15	20	25	32	40	50
L	80.0	100.0	115.0	135.0	160.0	190.0
H	48.5	58.0	70.0	80.0	93.0	112.0
D	14.0	19.0	25.0	31.8	38.1	50.0
W	0.93	0.93	0.93	0.93	0.93	0.93
X	Ø 0.34	Ø 0.34	Ø 0.34	Ø 0.34	Ø 0.34	Ø 0.34
Kgs	0.31	0.49	0.71	0.99	1.46	2.44

N.	Part Name	Materials
1	Body	Bronze - ASTM B62 C83600
2	Screen	Stainless Steel - 304
3	Cap	Bronze - ASTM B62 C83600
4	Gasket	Aramid fibres with binders

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.