




ART 194 PRS

PN16 Brass Swing Check Valve



Features

- Universal M & V Profile 15mm to 35mm
- Dedicated M Profile 42mm & 54mm
- 5 year warranty

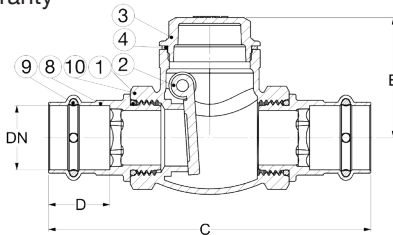


Technical data

Max pressure: 16 Bar

Working temp: -10°C to 150°C

| DN | 15 | 22 | 28 | 35 | 42 | 54 |
|-----|------|------|------|------|------|------|
| B | 42.5 | 46 | 53 | 61 | 62.5 | 70 |
| C | 111 | 130 | 142 | 156 | 172 | 208 |
| D | 22 | 25 | 27 | 27 | 32 | 37 |
| Kv | 3.6 | 9.5 | 23 | 35 | 56 | 86 |
| Kgs | 0.32 | 0.48 | 0.74 | 1.04 | 1.25 | 2.07 |

| N. | Part Name | Materials |
|----|----------------|-----------------|
| 1 | Body | Brass CC754S |
| 2 | Swing Disc | Brass C754S |
| 3 | Plug | Brass C754S |
| 4 | Gasket | NA1100 Black |
| 5 | Pin | Brass C754S |
| 6 | Gasket | Vulkan |
| 7 | Screw | Brass C754S |
| 8 | Adaptor | DZR Brass CW511 |
| 9 | O-Ring (Delta) | EPDM 70 PEROX |
| 10 | O-Ring | EPDM 70 PEROX |

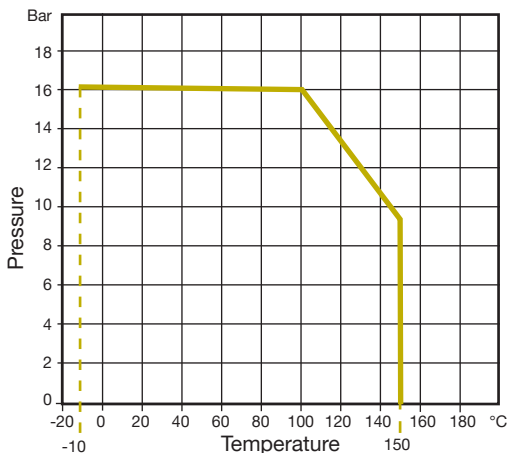

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.