


ART 400

EPDM PN16 Screwed Flexible Connector



Features

- Available Screwed BSP Taper BS21 (ISO 7/1) or NPT (ANSI B1.20.1)
- Galvanised malleable iron union ends
- Nylon cord fabric with steel reinforcement
- Available with NBR body (ART 410)

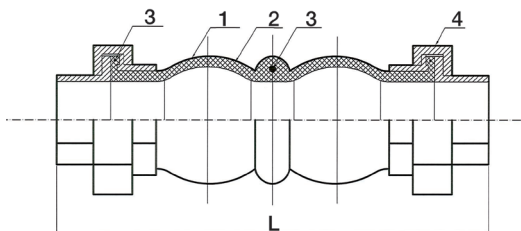



Technical data

Max pressure: 16 Bar

Working temp: -20°C to +100°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
L	200	200	200	200	200	200	245	245
HD	22	22	22	22	22	22	22	22
DA	45°	45°	45°	45°	45°	45°	45°	45°
Ext	5.6	5.6	5.6	5.6	5.6	5.6	5.7	5.8
Comp	22	22	22	22	22	22	22	22
Kgs	0.70	0.90	1.15	1.40	1.65	2.25	3.25	4.20

N.	Part Name	Materials
1	Body	EPDM
2	Reinforcement	Nylon Cord Wire
3	Pressure Ring	Steel Wire
4	Union End	Malleable Iron

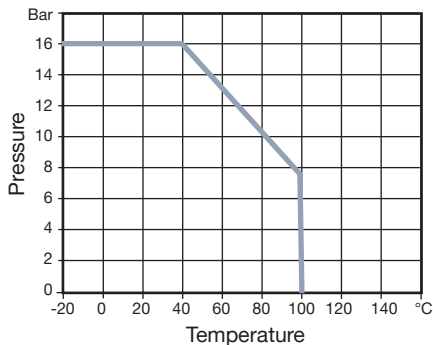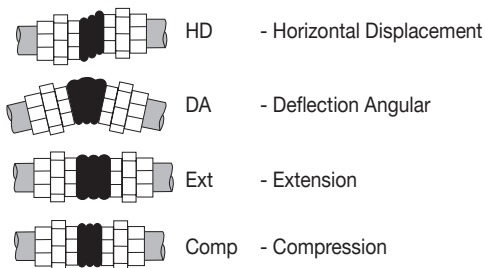

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.