ART 6100 ANSI ON/OFF with Solenoid **Modulating Float Control Valve with Solenoid Valve**




Features


- Automatic Control Valve
- Suitable for potable water applications
- WRAS Approved epoxy coated body
- Flange conforms to ANSI 150 (B16.42)
- Available flanged ANSI Class 300
- Stainless Steel pilot tubing, valves, float pilot and brass pilot solenoid valve
- Copper float option
- Normally closed and normally open option


Technical data

Max pressure: 16 Bar Minimum differential pressure: 5PSI (0.035MPa) Working temp: 0°C to +80°C




DN	50	65	80	100	125	150	200	250	300
L	230	290	310	350	400	480	600	730	850
E	152.4	177.8	190.5	228.6	254.0	279.4	342.9	406.4	482.6
С	120.7	139.7	152.4	190.5	215.9	241.3	298.5	362.0	431.8
n-Ød	4-19	4-19	4-19	8-19	8-22.4	8-22.4	8-22.4	12-25.4	12-25.4
В	164	194	218	252	286	348	476	574	662
Н	335	355	370	390	420	455	510	575	630
H1	242	252	270	280	295	313	340	372	400
Kgs	15	19	25	32	67	71	135	317	422





V1. Dimensions in mm This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice


ART 6100 ANSI ON/OFF with Solenoid

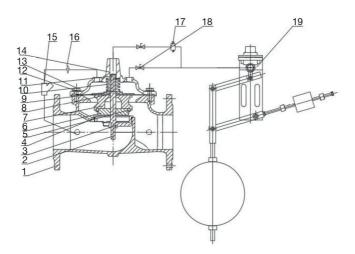


Ν.	Part Name	Materials		
1	Body	Ductile Iron		
2	Stem	Stainless Steel 304		
3	Seat	Stainless Steel 304		
4	O-Ring	NBR		
5	Disc Ring	NBR		
6	Disc Retainer	Ductile Iron		
7	Disc Guide	Ductile Iron		
8	Diaphragm	EPDM		
9	Diaphragm Washer	Ductile Iron		
10	Spring	Stainless Steel 304		
11	Cover Bearing	Stainless Steel 304		
12	Screw	Stainless Steel 304		
13	Washer	Stainless Steel 304		
14	Cover	Ductile Iron		
15	Strainer	Stainless Steel 304		
16	Needle Valve	Stainless Steel 304		
17	Solenoid Valve	Brass		
18	Ball Valve	Stainless Steel 304		
19	ON-OFF Float Control Valve	Stainless Steel 304		

ART 6100 ANSI ON/OFF with Solenoid

Pilot Valve Detail - ART 6175

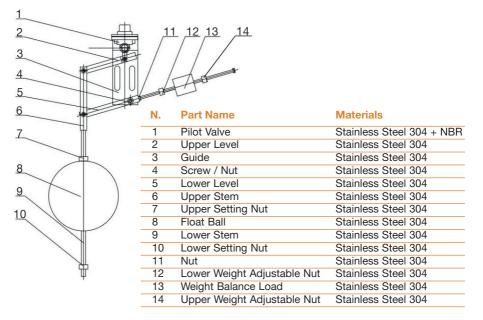


Solenoid Pilot Valve - ART 6180 NC / ART 6180 NO



Ν.	Part Name	Materials
1	Body	Brass
2	Diaphragm Kits	NBR / Stainless Steel 304
3	Bolt	Stainless Steel 304
4	Adaptor	Stainless Steel 304
5	O-Ring	NBR
6	Core	Brass / Nylon
7	Spring	Stainless Steel 304
8	2W Pilot	Brass / NBR
9	Nut	Brass
10	Washer	Brass

ART 6100 ANSI ON/OFF with Solenoid

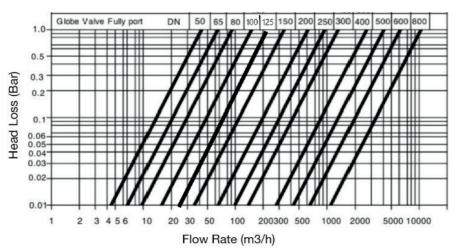

Flow curve of the main valve at fully open status