



Globe Valves

Issue 01



It's all at Albion

ART 350

PN32 Bronze Globe Valve




Features

- Screwed BSP Taper (ISO 7/1)
- Union bonnet
- Rising stem
- PTFE renewable disc
- BS 5154 (BS EN12288)

Technical data

Max pressure: 32 Bar

Working temp: -10°C to +200°C

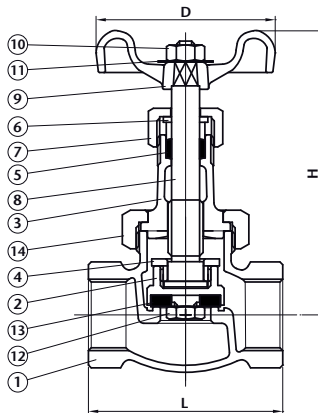


DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	57.0	67.0	76.5	88.0	102.5	121.5
H	89	101	116	128	142	167
D	62	68	80	90	102	111
Kv	3.0	5.7	10.4	19.0	26.0	43.3
Kgs	0.46	0.66	0.98	1.44	2.16	3.23

N. Part Name

Materials

1 Body	Bronze ASTM B62 C83600
2 Disc Holder 1/2" & 3/4"	Brass ASTM B16 C36000
2 Disc Holder 1" - 2"	Bronze ASTM B62 C8600
3 Cap	Bronze ASTM B62 C83600
4 Lock Nut	Brass ASTM B16 C36000
5 Stem Packing	Teflon PTFE
6 Gland	Brass ASTM B16 C36000
7 Packing Nut	Brass ASTM B16 C36000
8 Stem	DZR
9 Handwheel	Cast Iron ASTM A126 Class B
10 Wheel Nut	Steel Zn Plated ASTM A563
11 Nameplate	Aluminium ASTM B29 1100
12 Disc Nut 1/2" & 3/4"	Brass ASTM B16 C36000
12 Disc Nut 1" - 2"	Bronze ASTM B62 C83600
13 Disc Teflon	Glass field with PTFE
14 Union Nut	Bronze ASTM B62 C83600

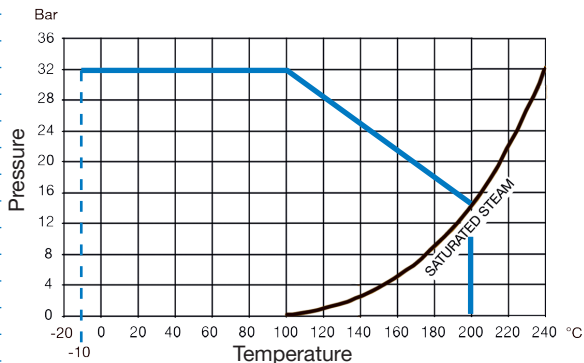

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.


ART 349

PN16 Bronze Globe Valve



Features

- Available in Screwed BSP Taper (ISO 7/1) or NPT (ANSI B1.20.1)
- Screwed bonnet
- Rising stem
- Bronze seat
- MSS-SP-80

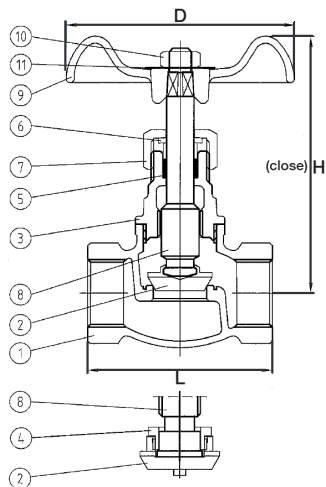

For sizes 1 1/4" to 2"

Technical data


Max pressure: 16 Bar

Working temp: 0°C to +232°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	49	56	65	75	84	99
H	70	70	87	94	104	124
D	54	57.5	64	74	74	87
Kv	3.3	6.1	9.5	18.2	25.1	43.3
Kgs	0.26	0.35	0.54	0.78	1.05	1.60

N. Part Name Materials

1 Body	Cast Bronze ASTM B62 C83600
2 Disc	Brass (1/2" - 1") C27450 Cast Bronze (1.1/4" - 2") ASTM B62 C83600
3 Bonnet	Cast Bronze ASTM B62 C83600
4 Lock Nut	Brass C27450
5 Stem Packing	Teflon PTFE
6 Gland	Brass ASTM B16 C36000
7 Packing Nut	Brass ASTM B16 C36000
8 Stem	Brass C27450
9 Handwheel	Cast Iron ASTM A126 CLASS B
10 Wheel Nut	Steel ASTM A563 Zn Plated
11 Nameplate	Aluminium ASTM B209 1100

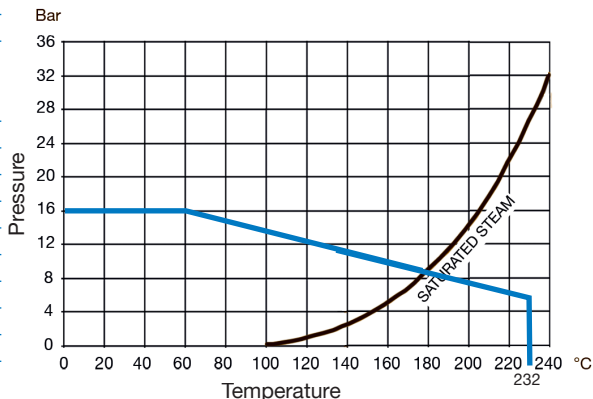


ART 390

PN16 Flanged Bronze Globe Valve



Features

- Flanged PN16 to BS EN1092
- BS 5154 (BS EN12288)

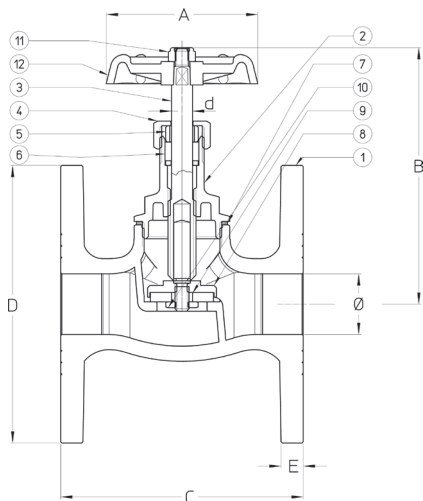


Technical data

Max pressure: 16 Bar

Working temp: -10°C to +170°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Ø	15	20	25	32	40	50	70	80	100
A	55	55	65	65	80	80	120	120	175
B	98	108	120	130	155	165	210	265	305
C	84	95	105	115	134	156	170	180	200
D	95	105	120	140	150	165	185	200	230
E	8	8	9.5	9.5	11	11	13	13	17
d	8	8	9	9	10	10	16	19	22
Kv	2.3	4.8	7.0	11.0	17.0	25.0	57.0	72.0	120.0
Kgs	1.23	1.71	2.30	3.32	4.63	6.00	6.84	11.80	17.90

N.	Part Name	Materials
1	Body	Bronze CC491K
2	Bonnet	Brass CW617N
3	Stem	Brass CW617N
4	Gland Nut	Brass CW617N
5	Gland	Brass CW617N
6	Gland Packing	AF 15/MA
7	Body Packing	NA 1100
8	Disc Holder	Brass CW617N
9	Disc	PTFE
10	Disc Nut	Brass CW617N
11	Nut	Steel
12	Handwheel	Aluminium Alloy

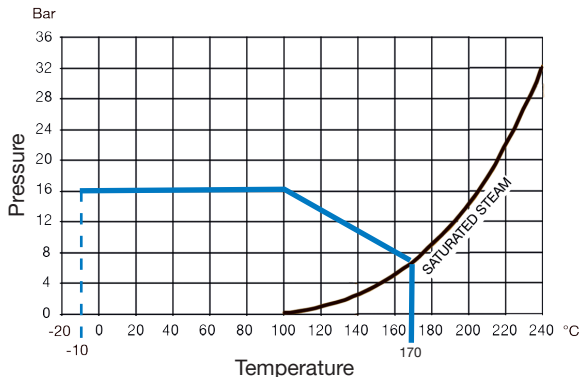

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.


ART 348

PN20 Bronze Globe Valve



Features

- Screwed BSP Taper (ISO 7/1) or NPT (ANSI B1.20.1)
- EN12288 / MSS-SP-80

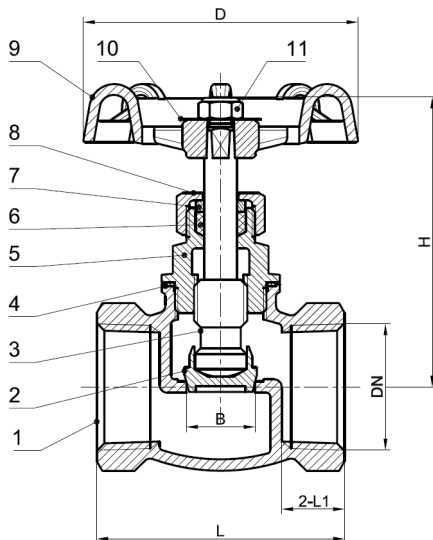

Technical data


Max pressure: 20 Bar

Working temp: -10°C to +180°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
B	10	13	18	23	30	38
L1	13.5	14.5	16.5	17.5	17.5	22.5
L	50	56	65	74	80	100
D	60	60	72	72	78	99
H	62.5 - 69.5	69.5 - 77	76.7 - 85	88.6 - 99	98 - 109	114.6 - 131
Kv	2.3	3.4	6.0	9.5	15.5	27.7
Kgs	0.27	0.33	0.55	0.78	1.00	1.67

N. Part Name Materials

1	Body	Bronze - C83600 ASTM B62
2	Disc	Bronze - CW617N ASTM C38000
3	Stem	Bronze - CW617N ASTM C38000
4	Seal Ring	PTFE
5	Bonnet	Bronze - C83600 ASTM B62
6	Packing	PTFE
7	Gasket	Brass - HPb59-2 RA C35300 ASTM B36
8	Packing Gland	Brass - HPb59-2 RA C35300 ASTM B36
9	Handwheel	Cast Iron - HT200 ASTM A48
10	Nameplate	Aluminium
11	Nut	Stainless Steel 304 - ASTM A240

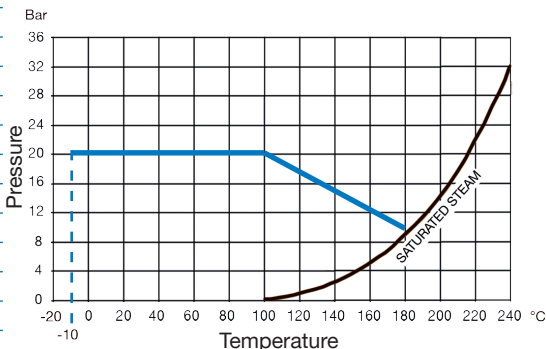

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

ART 961

PN16 Stainless Steel Globe Valve



Features


- BSP Parallel (ISO 7/1)
- PN16 rated



Technical data


Max pressure: 16 Bar

Working temp: -25°C to +180°C

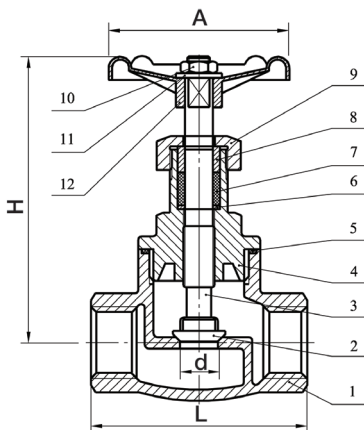

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	10	12	15	20	25	32	40	50
L	55	55	67	75	85	101	115	136
H	79	79	79	91	106	125	136	146
A	65	65	65	77	77	97	97	97
Kv	3.7	4.8	6.7	8.6	17.0	25.0	36.0	54.0
Kgs	0.36	0.35	0.37	0.49	0.66	1.16	1.44	2.16

N.	Part Name	Materials
1	Body	CF8M
2	Petal	Stainless Steel 316
3	Stem	Stainless Steel 316
4	Cap	CF8M
5	Gasket	PTFE
6	Washer	Stainless Steel 304
7	Stem Packing	PTFE
8	Ring	Stainless Steel 304
9	Gland Ring	Stainless Steel 304
10	Wheel Nut	Stainless Steel 304
11	Plate	Stainless Steel 304
12	Handwheel	Aluminium Alloy

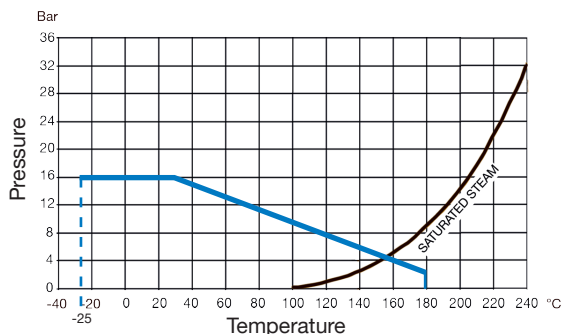

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

ART 260

PN16 Cast Iron Globe Valve




Features

- Flange mounting PN16 only
- BS EN558-1 series 10
- Conforms to EN13789

Technical data

Max pressure: 16 Bar


Working temp: -10°C to +230°C

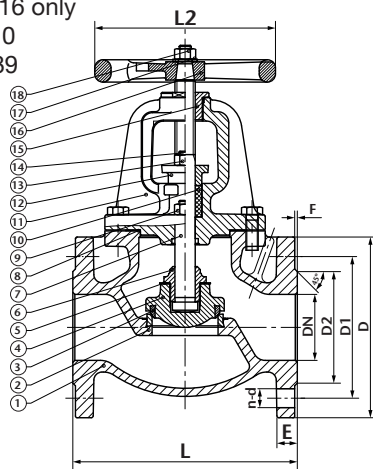

DN	50	65	80	100	125	150	200	250	300
D	165	185	200	220	250	285	340	405	460
D1	125	145	160	180	210	240	295	355	410
D2	99	118	132	156	184	211	266	319	370
E	20	17.5	19.1	23.9	23.9	25.4	28.6	30.2	31.8
F	3	3	3	3	3	3	3	3	4
L	203	216	241	292	330	356	495	622	698
L2	178	178	200	254	300	300	348	400	457
n-d	4-19	4-19	8-19	8-19	8-19	8-23	12-23	12-28	12-28
Kgs	15.6	21.5	30.9	46.8	68.4	92.6	157	219	302

N. Part Name Materials

1	Body	Cast Iron EN1561 EN-GJL-250
2	Body Ring	Cast Bronze BS1400 LG2
3	Disc Ring	Cast Bronze BS1400 LG2
4	Disc	Cast Iron EN1561 EN-GJL-250
5	Stop Washer	Stainless Steel BS970 304S15
6	Nut	Cast Brass BS1400 PCB1
7	Stem	Stainless Steel BS970 420S37
8	Flange Gasket	Graphite
9	Bolt	Cast Iron BS970 43A
10	Packing	Graphite
11	Bonnet	Cast Iron EN1561 EN-GJL-250
12	Gland Follower	Ductile Iron EN1563 EN-GJS-450-10
13	Nut	Steel BS970 43A
14	Bolt	Steel BS970 43A
15	Stem Nut	Cast Brass BS1400 AB1
16	Handwheel	Cast Iron EN1561 EN-GJL-250
17	Washer	Steel BS970 43A
18	Nut	Steel BS970 43A

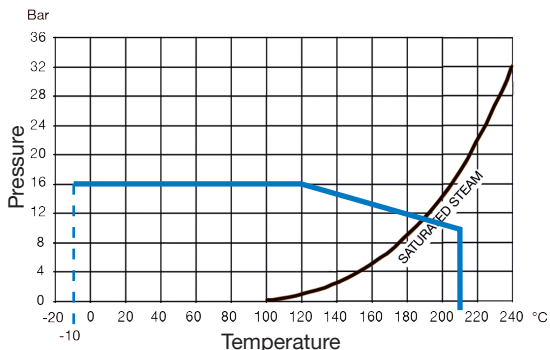

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.


ART 261 ANSI

ANSI 125 Cast Iron Globe Valve



Features

- Flanged ANSI 125 (B16.1)
- Class 125 rated
- OSY rising stem
- Conforms to ASME B16.10 & MSS SP-85

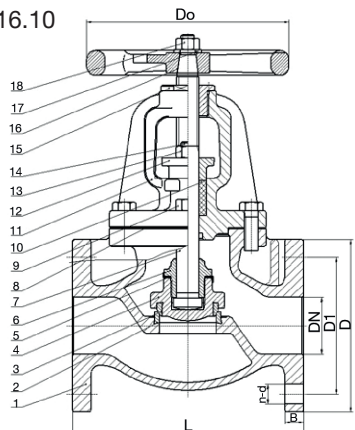

Technical data


Max pressure: 13.8 Bar

Working temp: -10°C to +230°C

DN	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
L	203	216	241	292	330	356	495	622	698.5
D	152	178	190	229	254	279	343	406	483
D1	120.5	139.5	152.5	190.5	216	241.5	298.5	362	432
B	15.9	17.5	19.1	23.9	23.9	25.4	28.6	30.2	31.8
n-d	4-19	4-19	4-19	8-19	8-22	8-22	8-22	12-25	12-25
Do	178	178	200	254	300	300	348	400	457
Kgs	15.6	21.5	30.9	46.8	68.4	92.6	157	219	302

N. Part Name Materials

1	Body	Cast Iron ASTM A 126-B
2	Body Ring	Cast Bronze ASTM B 62
3	Disc Ring	Cast Bronze ASTM B 62
4	Disc	Cast Iron ASTM A 126-B
5	Washer	Stainless Steel ASTM 304
6	Disc Nut	Cast Brass Mn-Brass
7	Stem	Brass ASTM B 16
8	Gasket	Graphite Non-Asbestos
9	Bolt	Steel ASTM A 307-B
10	Packing	Graphite Non-Asbestos
11	Bonnet	Cast Iron ASTM A 126-B
12	Packing Gland	Ductile Iron ASTM A536 65-45-12
13	Nut	Steel
14	Bolt	Steel
15	Stem Nut	Cast Brass Mn-Brass
16	Handwheel	Cast Iron ASTM A 126-B
17	Washer	Steel
18	Nut	Steel ASTM A 563-B

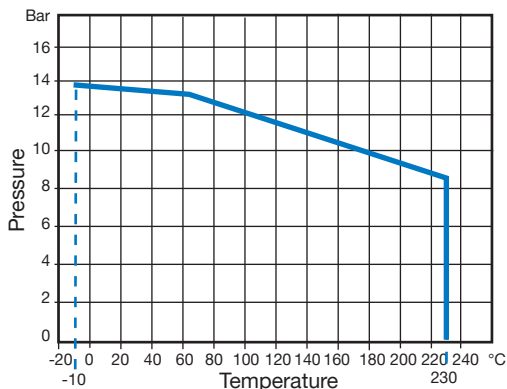

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.