


FS

Full Socket OD Machined




Features

- Made from CF8M (316) Stainless Steel material and conform to ISO 4144 standard.
- Threads are to BSP Parallel (ISO 7/1) or NPT (ANSI B1.20.1).
- Material certificates available on request.
- Tested & inspected prior to despatch.
- 12 month warranty from date of installation.
- Manufactured in accordance with ISO9001:2015 quality system.

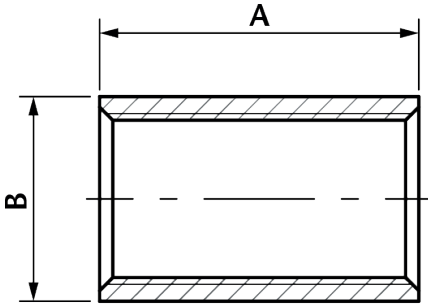

DN	A	B	Kgs
1/8"	17.0	13.5	0.009
1/4"	24.0	16.7	0.021
3/8"	25.0	20.4	0.029
1/2"	32.0	24.9	0.045
3/4"	35.0	30.0	0.057
1"	41.0	37.8	0.101
1 1/4"	46.8	47.0	0.175
1 1/2"	46.8	53.0	0.193
2"	54.5	65.7	0.331
2 1/2"	63.0	82.0	0.505
3"	69.0	95.8	0.722
4"	81.0	121.5	1.061



Temperature (°C)	Non-shock maximum working pressure (bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

- NOTE 1 Pressure for intermediate temperatures may be determined by the interpolation method.
- NOTE 2 Temperatures indicated are those of internal fluid.
- NOTE 3 Piping loads, stresses and moments are not taken into account.