



RS

Reducing Socket



Features

- Made from CF8M (316) Stainless Steel material and conform to ISO 4144 standard.
- Threads are to BSP Parallel (ISO 7/1) or NPT (ANSI B1.20.1).
- Material certificates available on request.
- Tested & inspected prior to despatch.
- 12 month warranty from date of installation.
- Manufactured in accordance with ISO9001:2015 quality system.

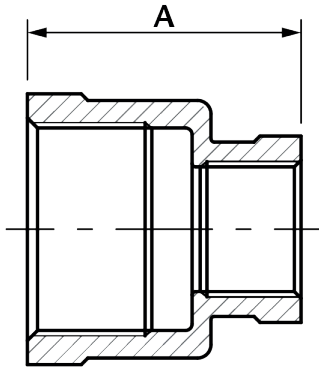

DN	A	Kgs
1/4" x 1/8"	26.0	0.029
3/8" x 1/4"	30.0	0.042
1/2" x 1/4"	34.0	0.055
1/2" x 3/8"	34.0	0.052
3/4" x 1/2"	37.0	0.085
1" x 1/2"	42.0	0.115
1" x 3/4"	42.0	0.136
1 1/4" x 1/2"	48.0	0.168
1 1/4" x 3/4"	48.5	0.175
1 1/4" x 1"	48.5	0.194
1 1/2" x 3/4"	52.0	0.221
1 1/2" x 1"	52.0	0.225
1 1/2" x 1 1/4"	52.5	0.245
2" x 1"	57.0	0.242
2" x 1 1/4"	58.0	0.363
2" x 1 1/2"	58.0	0.372

Temperature (°C)	Non-shock maximum working pressure (bar)
-20 to 40	20
100	16.5
150	15
200	14
220	13.5

- NOTE 1 Pressure for intermediate temperatures may be determined by the interpolation method.
- NOTE 2 Temperatures indicated are those of internal fluid.
- NOTE 3 Piping loads, stresses and moments are not taken into account.