

# ART 36

## DZR Brass Double Check Valve




### Technical data

Max pressure: 16 Bar

Working temp: -10°C to 85°C


### Features

- Screwed F/F BSP Parallel (ISO 228/1) ends
- Conforms with EN13959
- Prevention of back flow and back syphonage contamination
- Suitable for Fluid Categories 1, 2 & 3

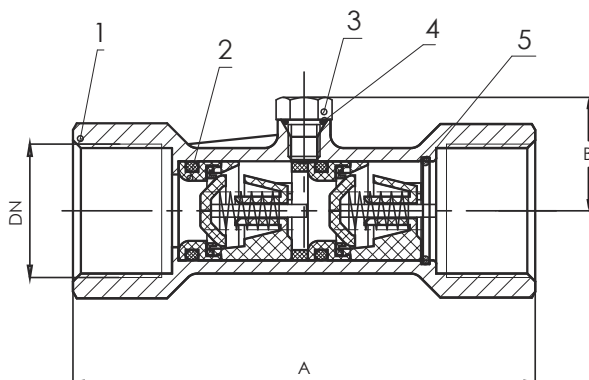

| DN  | 1/2" | 3/4" | 1"   | 1 1/4" | 1 1/2" | 2"   |
|-----|------|------|------|--------|--------|------|
| A   | 71   | 83   | 98   | 118    | 134    | 173  |
| B   | 17.5 | 20   | 22.8 | 26     | 30     | 35   |
| Kv  | 3.7  | 7.1  | 10.3 | 17.5   | 26.0   | 42.5 |
| Kgs | 0.11 | 0.17 | 0.28 | 0.45   | 0.64   | 1.19 |

| N. | Part Name       | Materials           |
|----|-----------------|---------------------|
| 1  | Body            | DZR Brass           |
| 2  | Non-return core | POM                 |
| 3  | Screw           | Brass HPb59-T       |
| 4  | O-Ring          | NBR                 |
| 5  | Catch Spring    | Stainless Steel 304 |

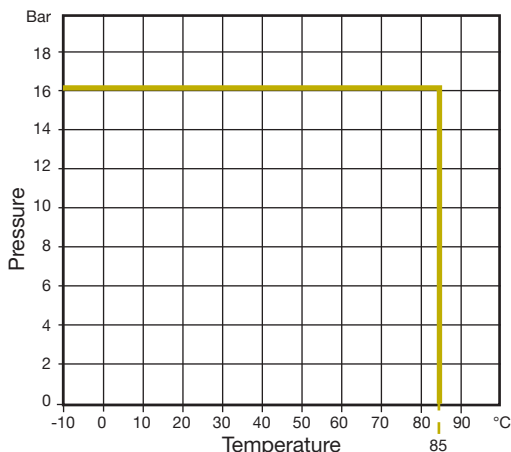

V2 Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.