



ART 172

PN16 Ductile Iron Ball Check Valve



Features

- Flanged mounting PN16 only
- Valve design according to EN12334
- DIN3202 face-to-face
- Epoxy coat finish

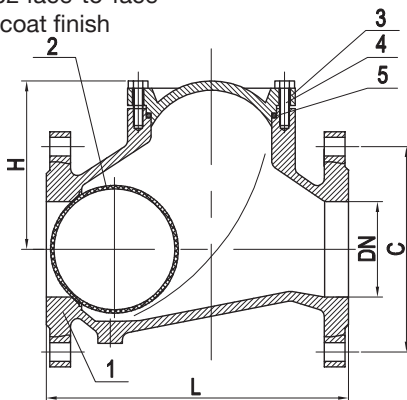


Technical data

Max pressure: 16 Bar
Working temp: 0°C to +80°C

DN	50	65	80	100	125	150	200	250	300
L	200	240	260	300	350	400	500	600	700
C	106	129	146	194	207	240	322	388	458
H	125	145	160	180	210	240	295	355	410
Kv	85.70	135.71	242.86	378.57	457.14	4000.00	1557.14	3571.43	5000.00
Kgs	7.7	11.2	15.4	21.7	33.0	45.3	90.42	163.0	230.0

N.	Part Name	Materials
1	Body	Ductile Iron EN1563
2	Ball	Metal NBR Coated
3	Cap	Ductile Iron EN1563
4	Bolt	Steel
5	Gasket	NBR

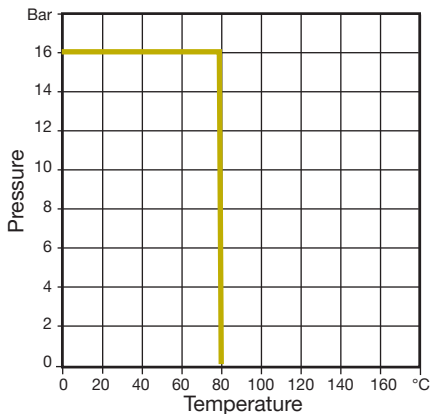

V2 Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.