

ART 1551

Straight Lockshield Radiator Valve




Features

- Screwed BSP Parallel M/F (ISO 228/1)
- Auto seal tail piece
- Suitable for use with all radiators
- BSP to copper adaptor available on request


Technical data

Max pressure: 10 Bar

Max working temp: 100°C

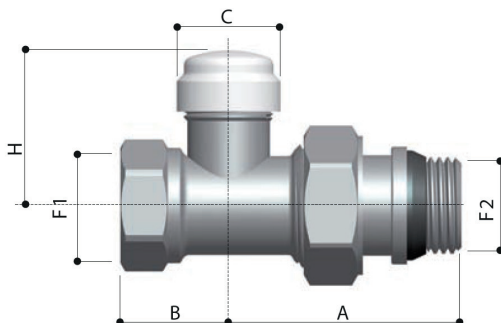

DN	1/2"	3/4"
A	49.5	58.0
B	23	28
H	32	34
C	22	22
F1	1/2"	3/4"
F2	1/2"	3/4"

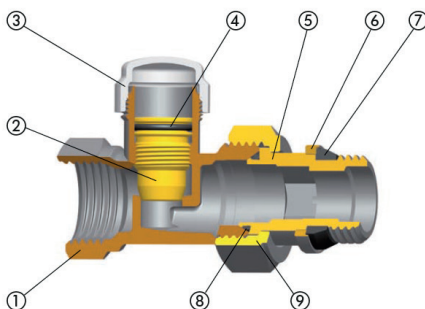


N.	Part Name	Materials
1	Body	Nickel Plated Brass (CW617N)
2	Shutter	Brass (CW614N)
3	Cap	ABS
4	O-Ring	EPDM
5	Tail Piece	Nickel Plated Brass (CW617N)
6	Washer	Nickel Plated Brass (CW614N)
7	Gasket Rubber	EPDM
8	Gasket	PTFE
9	Nut	Nickel Plated Brass (CW614N)

ART 1551



Flow and Pressure Drop

1/2"

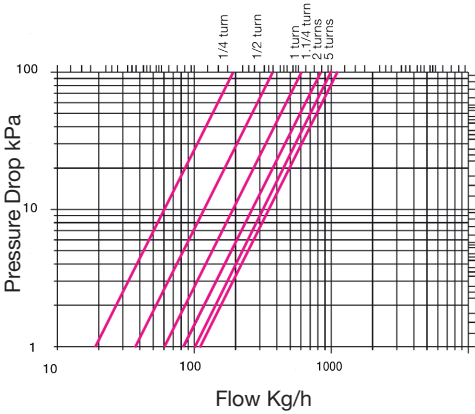

3/4"

